


City of Streetsboro

Engineering Department

9184 State Route 43
Streetsboro, OH 44241


(330) 626-4942
Fax: (330) 626-4035

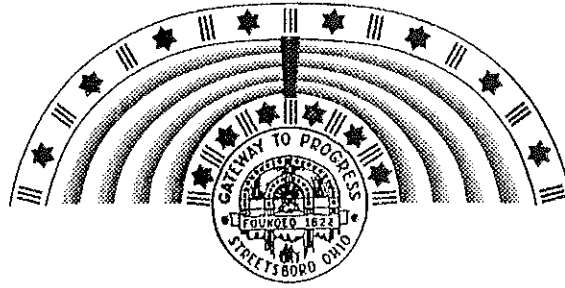


Handicap Ramp Specifications

Truncated Dome Products

- ADA Solutions Cast-In-Place Paver Units (www.adatile.com)
- DWS EZ-Set Polymer Concrete Panels (Path Master – Ron Sinko rsinko@pathmasterinc.com)
- Other (prior to use submit specs & sample to City Engineer for approval)




SECTION OF DOME FROM A DETECTABLE WARNING.
DRAWING SHOWS HEIGHT, TOP AND BOTTOM DIMENSIONS

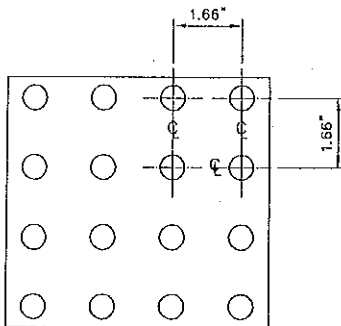

PLAN AND SECTION VIEWS OF DETECTABLE WARNING DOMES AND
THEIR RELATIVE SPACING ON THE X AND Y AXIS

24" DETECTABLE WARNING STRIP DETAIL

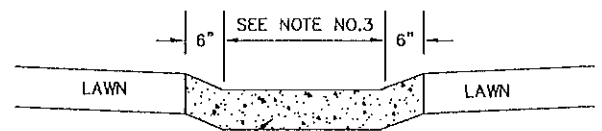

CONCRETE CURB RAMP, 6" THICK

SECTION B-B


City of Streetsboro

Engineering Department


9184 State Route 43

Streetsboro, OH 44241

(330) 626-4942
Fax: (330) 626-4035

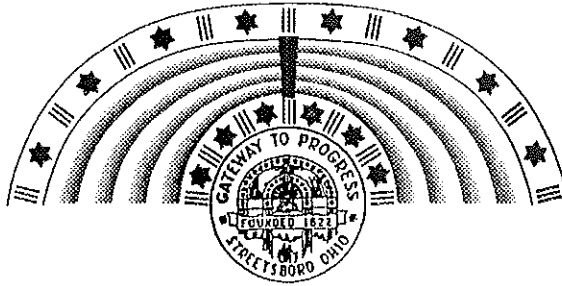


Handicap Ramp Specifications

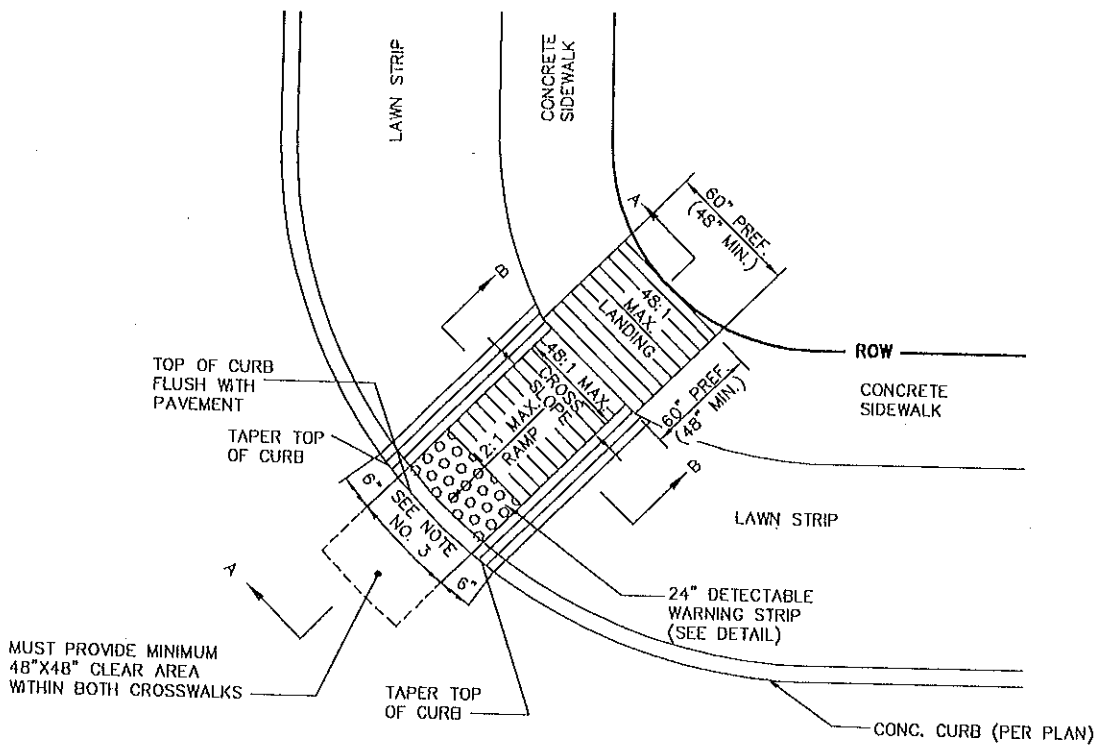

NOTES:

1. THICKNESS FOR ALL CURB RAMPS SHALL BE 6" INCHES.
2. MINIMUM SIDEWALK WIDTH IS 4 FEET W/48:1 CROSS SLOPE
3. CURB RAMP WIDTH TO COINCIDE WITH SIDEWALK WIDTH.

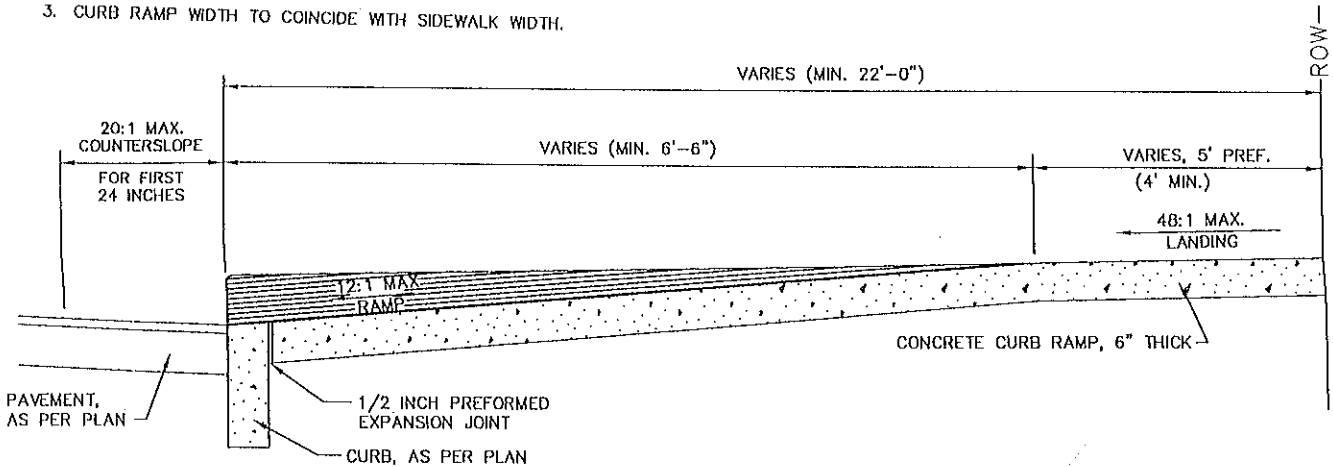

SECTION A-A